

NP Series



Valve Regulated Lead-Acid Rechargeable Batteries



For more information contact your nearest Yuasa sales office on **1300 362 287** or visit the website www.yuasa.com.au

Queensland	New South Wales	Victoria	South Australia	Western Australia	Tasmania
37-65 Cobalt Street Carole Park QLD 4300 F 07 3361 6705	44-46 Mandarin Street Villawood, NSW 2163 F 02 9754 9213	42-46 Dunlop Road Mulgrave, VIC 3170 F 03 8541 4406	8 Symonds Street Royal Park, SA 5014 F 08 8447 0808	163 Abernethy Road Belmont, WA 6984 F 08 9475 8905	Unit 3, 9 Farley Street Derwent Park Hobart, TAS 7009 FAX: 03 6272 2519



DISCLAIMER: The replacement battery information published in this selection guide has been obtained from the equipment manufacturers listed and unpublished information sources, except as otherwise noted. Users are cautioned that the information contained in this selection guide was the most current information at the time of publication and that such information is subject to change without notice from equipment manufacturers or field experience. Users should use the most current edition of the Yuasa Powersports battery guide. Century Yuasa Batteries Pty Ltd expressly denies any responsibility for the accuracy of the information provided to us.

While we have made every effort to accurately catalogue the replacement battery information contained within this guide, Century Yuasa Batteries Pty Ltd denies any liability for damages as a consequence of using the information in this guide. Users should also attempt to obtain replacement battery information from the equipment manufacturer's user manual or service department for the specific application.

RELIABILITY IS YOUR SECURITY.



Yuasa batteries are the trusted choice around the world for standby power in applications where system integrity is paramount. Yuasa NP batteries incorporate high energy density, advanced plate technology and a sealed construction to provide complete peace of mind.

TECHNICAL FEATURES

Sealed Construction

Yuasa's unique construction and sealing technique ensures no electrolyte leakage from case or terminals.

Electrolyte Suspension System

All NP batteries utilise Yuasa's unique electrolyte suspension system incorporating a microfine glass mat to retain the maximum amount of electrolyte in the cells.

The electrolyte is retained in the separator material and there is no free electrolyte to escape from the cells. No gels or other contaminants are added.

Recombination Technology

The design of Yuasa's NP batteries incorporates the very latest oxygen recombination technology to effectively eliminate the need for watering during normal use.

FEATURES

- Superb recovery from deep discharge
- Electrolyte suspension system.
- No watering due to gas recombination
- Multipurpose: float or cyclic use
- Usable in any orientation but continuous inverted
- Superior energy density
- Thick lead calcium grids for extended life
- Manufactured under stringent Yuasa quality assurance systems
- Application specific designs

Low Maintenance Operation

Due to the perfectly sealed construction and the recombination of gasses within the cell, the battery is almost maintenance free.

Terminals

NP batteries are manufactured using a range of terminals which vary in size and type. Please refer to details as shown below:

<p>Faston tab: 187 A</p> <table border="1"> <tr><th colspan="2">INCH = MM</th></tr> <tr><td>.250</td><td>6.35</td></tr> <tr><td>.185</td><td>4.70</td></tr> <tr><td>.124</td><td>3.15</td></tr> <tr><td>.098</td><td>2.50</td></tr> <tr><td>.059</td><td>1.50</td></tr> <tr><td>.031</td><td>0.80</td></tr> <tr><td>.020</td><td>0.50</td></tr> <tr><td>.004</td><td>0.10</td></tr> </table>	INCH = MM		.250	6.35	.185	4.70	.124	3.15	.098	2.50	.059	1.50	.031	0.80	.020	0.50	.004	0.10	<p>Faston tab: 187 B</p> <table border="1"> <tr><th colspan="2">INCH = MM</th></tr> <tr><td>0.472</td><td>12.00</td></tr> <tr><td>0.250</td><td>6.35</td></tr> <tr><td>0.236</td><td>6.00</td></tr> <tr><td>0.185</td><td>4.70</td></tr> <tr><td>0.079</td><td>2.00</td></tr> <tr><td>0.020</td><td>0.50</td></tr> </table>	INCH = MM		0.472	12.00	0.250	6.35	0.236	6.00	0.185	4.70	0.079	2.00	0.020	0.50	<p>Faston tab: 250 D</p> <table border="1"> <tr><th colspan="2">INCH = MM</th></tr> <tr><td>.310</td><td>7.90</td></tr> <tr><td>.250</td><td>6.35</td></tr> <tr><td>.16</td><td>4.0</td></tr> <tr><td>.031</td><td>0.8</td></tr> <tr><td>.020</td><td>0.5</td></tr> </table>	INCH = MM		.310	7.90	.250	6.35	.16	4.0	.031	0.8	.020	0.5
INCH = MM																																														
.250	6.35																																													
.185	4.70																																													
.124	3.15																																													
.098	2.50																																													
.059	1.50																																													
.031	0.80																																													
.020	0.50																																													
.004	0.10																																													
INCH = MM																																														
0.472	12.00																																													
0.250	6.35																																													
0.236	6.00																																													
0.185	4.70																																													
0.079	2.00																																													
0.020	0.50																																													
INCH = MM																																														
.310	7.90																																													
.250	6.35																																													
.16	4.0																																													
.031	0.8																																													
.020	0.5																																													
<p>Bolt fastened terminal E</p> <table border="1"> <tr><th colspan="2">INCH = MM</th></tr> <tr><td>.472</td><td>12.00</td></tr> <tr><td>.453</td><td>11.50</td></tr> <tr><td>.433</td><td>11.00</td></tr> <tr><td>.216</td><td>5.50</td></tr> <tr><td>.079</td><td>2.00</td></tr> </table>	INCH = MM		.472	12.00	.453	11.50	.433	11.00	.216	5.50	.079	2.00	<p>Bolt fastened terminal F</p> <table border="1"> <tr><th colspan="2">INCH = MM</th></tr> <tr><td>.59</td><td>15.0</td></tr> <tr><td>.216</td><td>5.5</td></tr> <tr><td>.295</td><td>7.5</td></tr> <tr><td>.197</td><td>5.0</td></tr> </table>	INCH = MM		.59	15.0	.216	5.5	.295	7.5	.197	5.0																							
INCH = MM																																														
.472	12.00																																													
.453	11.50																																													
.433	11.00																																													
.216	5.50																																													
.079	2.00																																													
INCH = MM																																														
.59	15.0																																													
.216	5.5																																													
.295	7.5																																													
.197	5.0																																													
<p>Bolt fastened terminal G</p> <table border="1"> <tr><th colspan="2">INCH = MM</th></tr> <tr><td>0.24</td><td>6</td></tr> <tr><td>0.27</td><td>7</td></tr> <tr><td>0.37</td><td>9.5</td></tr> <tr><td>0.71</td><td>18</td></tr> <tr><td>0.768</td><td>19.5</td></tr> </table>	INCH = MM		0.24	6	0.27	7	0.37	9.5	0.71	18	0.768	19.5	<p>JST No. VHR-2N I</p> <p>WIRE AWG #20 UL 1007</p> <p>JST No. VHR-2N (TERMINAL)</p> <p>JST SVH-21T-P1.1</p>																																	
INCH = MM																																														
0.24	6																																													
0.27	7																																													
0.37	9.5																																													
0.71	18																																													
0.768	19.5																																													

Operation in any Orientation

The combination of sealed construction and Yuasa's unique electrolyte suspension system allows operation in any orientation, with no loss of performance or fear of electrolyte leakage. (Excluding continuous use inverted)

Valve Regulated Design

The batteries are equipped with a simple, safe low pressure venting system which releases excess gas and automatically reseals should there be a build up of gas within the battery due to severe overcharge. (Note: On no account should the battery be charged in a sealed container)

Thick Lead Calcium Grids

The heavy duty lead calcium alloy grids provide an extra margin of performance and life in both cyclic and float applications and give unparalleled recovery from deep discharge.

Long Cycle Service Life

Depending upon the average depth of discharge, over 1000 discharge/charge cycles can be expected.

Float Service Life





The expected service life is five years in float standby applications.

Separators

The use of the special separator material provides a very efficient insulation between plates preventing inter-plate short circuits and prohibiting the shedding of active materials.


Long shelf Life

The extremely low self discharge rate allows the battery to be stored for extended periods up to one year at normal ambient temperatures with no permanent loss of capacity.

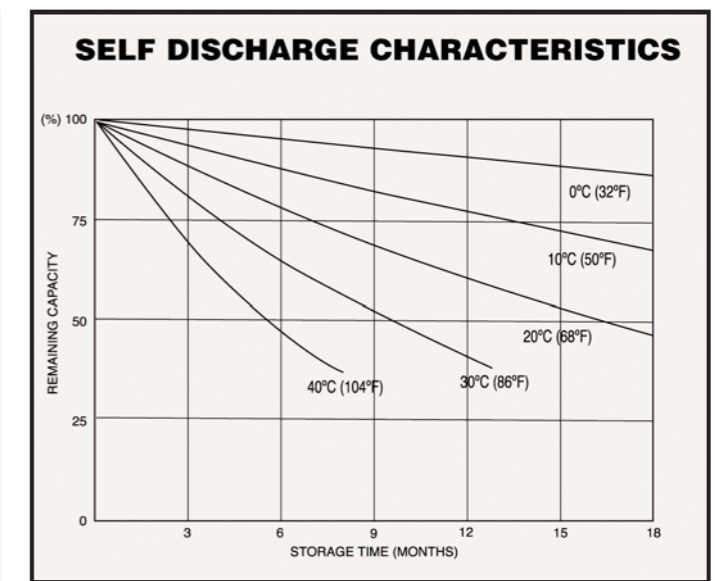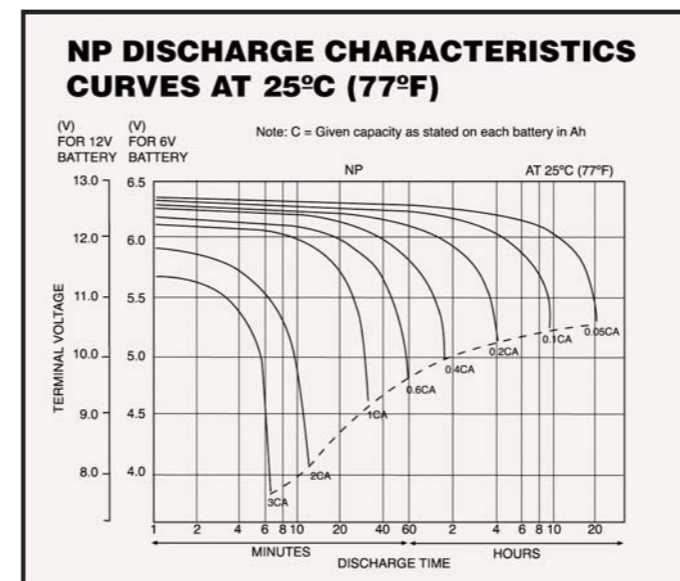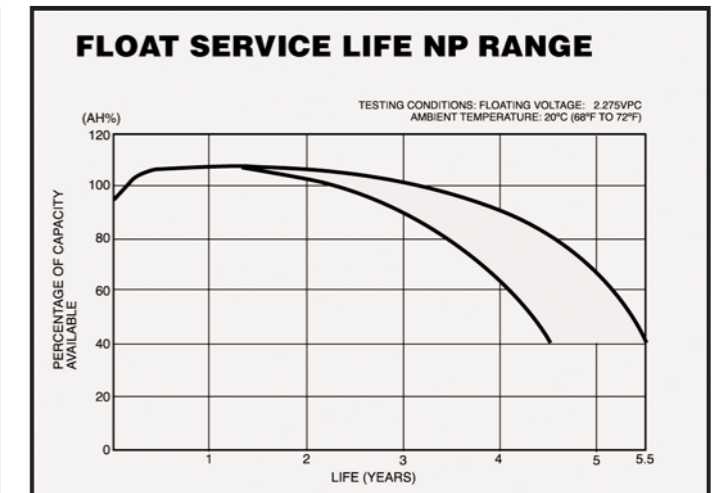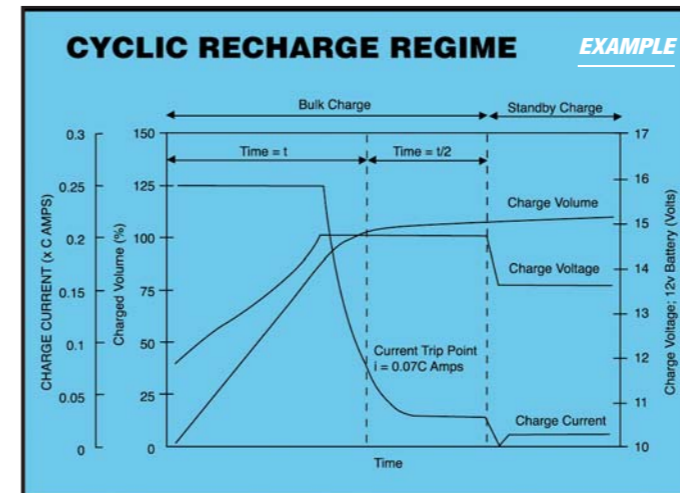

OPERATING TEMPERATURE RANGE.

Yuasa NP batteries can be used over a broad temperature range enabling considerable flexibility in system design and location.

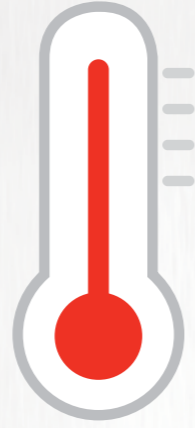

- Charge** -15°C to 50°C
- Discharge** -20°C to 60°C
- Storage** -20°C to 50°C (fully charged battery)




Applications

Yuasa NP batteries, have excellent deep discharge recovery characteristics coupled with long life on float standby making them ideal for a diverse range of applications in both cyclic or standby modes.

Charging For Float Standby Applications

Charged at 2.275 volts per cell continuous. The battery will seek its own current level and float fully charged. However, users should be aware that when charging from fully discharged, the battery can draw an initial charge current of approximately twice of its normal capacity.

Care should be taken to ensure this initial charge current (if uncontrolled) is within the output capability of the equipment. Float charge current at 2.275 volts per cell is typically 0.001C(Ampères).

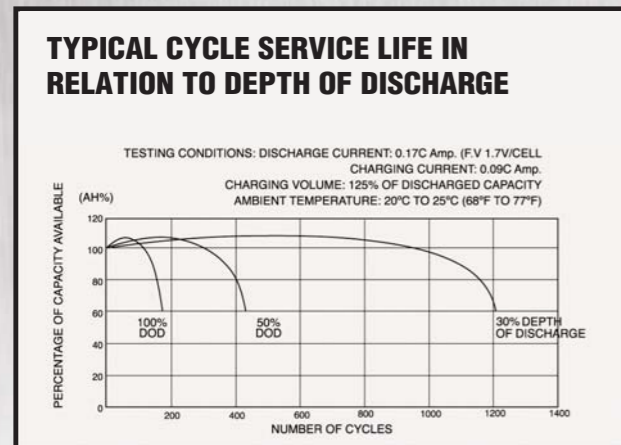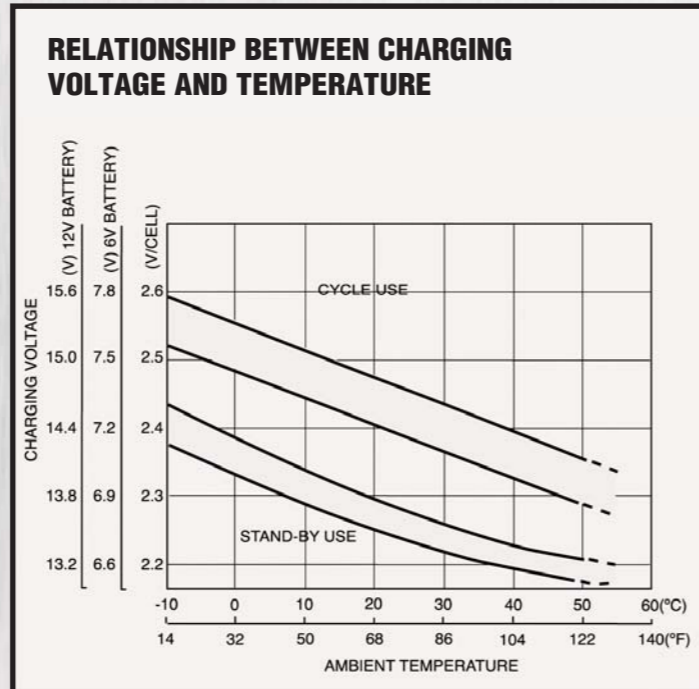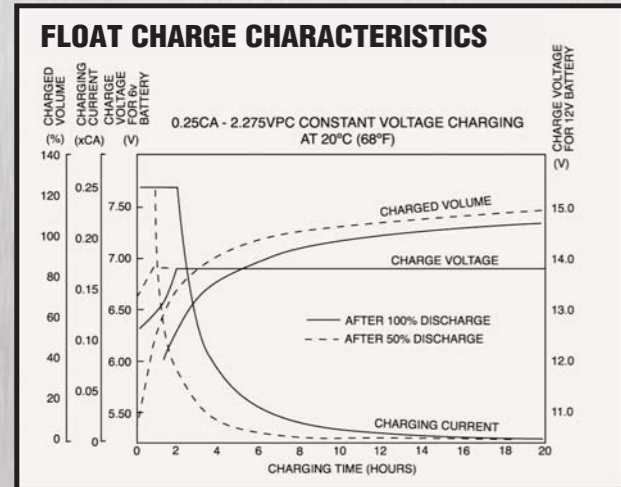

General Specifications

Item No	Product Type	Volts	Rated AH Capacity (20 hr rate) ¹	Nominal Dimensions (mm)				Weight (kg)	Layout	Terminal Size	Terminal Type
				L	W	H	TOTAL H				
6V											
175002	NP1.2-6	6	1.2	97	25	50	54.5	0.31	1	4.75mm	A
175010	NP3-6	6	3	134	34	59	64	0.63	1	4.75mm	A
175013	NP4-6	6	4	70	47	101	105.5	0.87	5	4.75mm	A
175018	NP7-6	6	7	151	34	93	97.5	1.26	1	4.75mm	A
175003	NP10-6	6	10	151	50	93	97.5	1.93	1	4.75mm	A
12V											
175000	NP0.8-12	12	0.8	96	25	61.5	61.5	0.35	6	VHR-2N	I
175001	NP1.2-12FR ²	12	1.2	97	48	54.5	54.5	0.58	3	4.75mm	A
175008	NP2-12	12	2	150	20	89	89	0.70	7	4.75mm	B
175006	NP2.3-12FR ²	12	2.3	178	34	60	64	0.95	1	4.75mm	A
175007	NP2.6-12	12	2.6	134	67	60	64	1.12	3	4.75mm	A
175012	NP4-12	12	4	90	70	102	105.5	1.67	1	4.75mm	A
175019	NPH5-12	12	5*	90	70	97.5	106	2.00	1	6.35mm	D
175015	NP7-12S	12	7	151	65	93	97.5	2.65	4	4.75mm	A
175017	NP7-12L	12	7	151	65	93	97.5	2.65	4	6.35mm	D
175016	NP7-12FR ²	12	7	151	65	93	97.5	2.65	4	4.75mm	A
175004	NP12-12	12	12	151	98	93	97.5	4.05	4	6.35mm	D
175005	NP18-12B	12	17.2	181	76	167	167	6.20	2	M5 BOLT	E
175009	NP24-12B	12	24	175	166	125	125	8.65	2	M5 BOLT	E
175011	NP38-12	12	38	197	165	170	170	14.20	2	M5 BOLT	F
175014	NP65-12	12	65	350	166	174	174	23.00	2	M6 BOLT	G

¹Final Voltage: 1.75V/cell, Temperature: 25°C. * Rated AH capacity at 10 hour rate. ² Flame retardant case.

Battery Layouts

