


PS12260H

12V

26Ah

VRLA

AGM



Manufactured to the latest International standards using premium grade raw materials and superior manufacturing processes, Century PS batteries provide reliable, trouble-free power in high-service-life applications.


The VRLA (Valve Regulated Lead Acid) recombinant design eliminates the need for regular maintenance and enables fitment in hard-to-reach locations without the loss of performance, capacity or life.


- ✓ Sealed construction with pressure relief system
- ✓ Operation in any orientation (except in an inverted position)
- Heavy duty grids
- Low self discharge
- √ 98% recyclable





Performance Specifications			
Nominal Voltage	12V		
Rated Capacity at 25°C	26.0Ah (20 hour, 10.5V) 24.4Ah (10 hour, 10.5V) 21.7Ah (5 hour, 10.5V) 16.3Ah (1 hour, 9.6V)		
Internal Resistance at 25°C	Approx. 15m Ω		
Maximum Discharge Current	390A (5 sec.)		
Maximum Charge Current	7.8A		
Charge Voltage	Float Charge at 25°C: 13.5V~13.8V Float charge voltage temperature correction factor from standard 25°C: -20mV/°C		
	Cyclic Charge at 25°C: 14.4V~15.0V Cyclic Charge voltage temperature correction factor from standard 25°C: -30mV/°C		
Operating Temperature Range	Discharge: -15°C~50°C Charge: 0°C~40°C Storage: -15°C~40°C		
Design life at 25°C	5 years		
Storage	Batteries can be stored for up to 6 months at 25°C after which recharging is recommended. For higher temperatures the time interval will be shorter.		

Physical Specifications			
Dimensions	Length: Width: Container Height: Overall Height:	164±2mm 125±2mm 174±2mm 181±2mm	
Terminal Type	T10		
Weight	Approx. 8.45kg		
Container Material	A.B.S		
















PS12260H

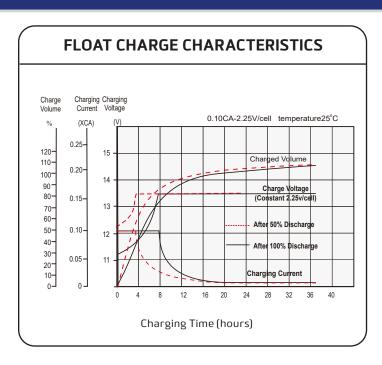

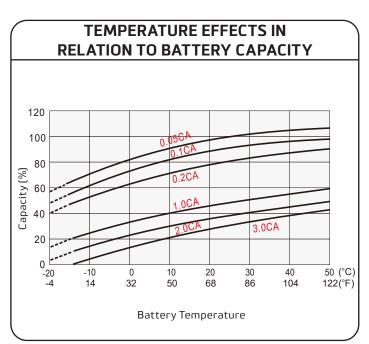


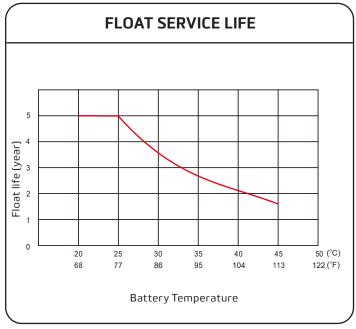



This battery is 98% recyclable. Help create a cleaner planet, return your used battery to the original place of purchase or your nearest Century Yuasa approved Battery Recycling Centre.

You can find your nearest recycling centre:





For more information contact a Century battery specialist: